

LIFTS WITH HORIZONTALLY FOLDING PLATFORM

The importance of good rear visibility



The automatic, twin-arm, electro-hydraulic lifts in the SKY Series have a horizontally folding platform. Thanks to a two-button control unit and the use of top quality materials, these devices are not only user friendly, they are also extremely reliable. Available in a wide range of sizes, they can be internally rear and side mounted in a wide variety of people carriers, whilst ensuring good visibility.

SPECIFICATIONS

- Movement powered by two hydraulic cylinders
- Horizontally folding platform with anti-slip surface
- Anti-rust powder paint coating
- Self-lubricating bushings and pins
- Two-button control unit
- 12-24V Electrical System
- For use at temperatures between -30°C and +70°C
- Valid EMC accreditation (E50)
- EC standard compliant





SAFETY DEVICES

- Front safety roll stop on the automatic loading platform
- Rear safety roll stop on the automatic loading platform
- Anti-tilting control valve
- Automatic extendable/retractable handrails

EMERGENCY

- Emergency operation lift via auxiliary hydraulic pump
- Emergency descent by unlocking descent valve

Technical Features

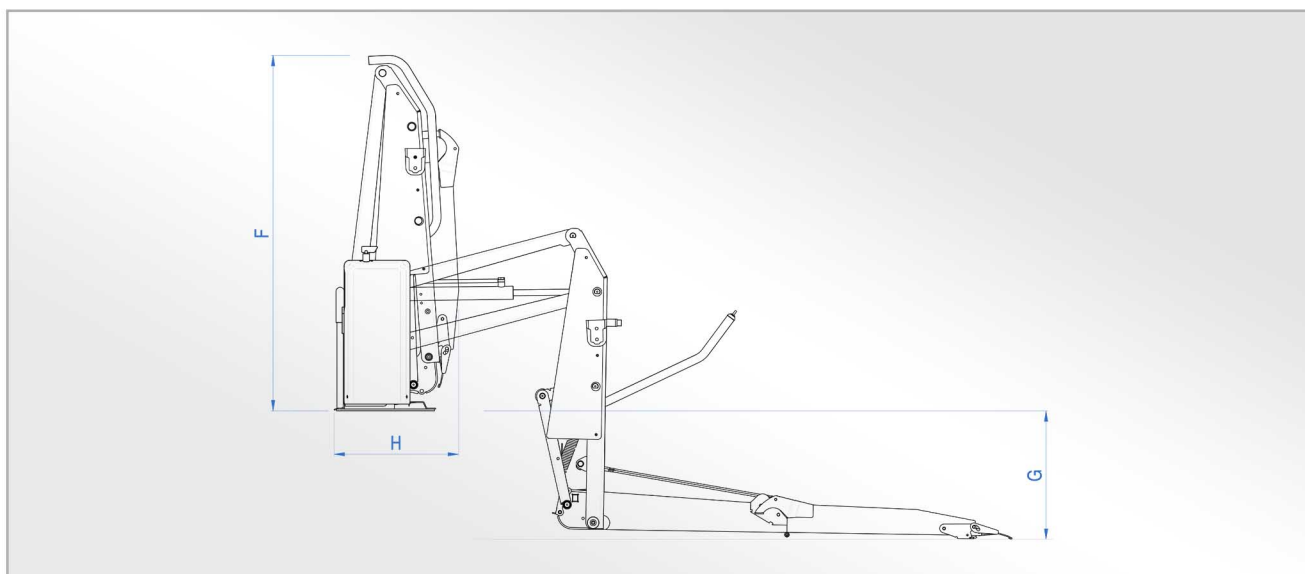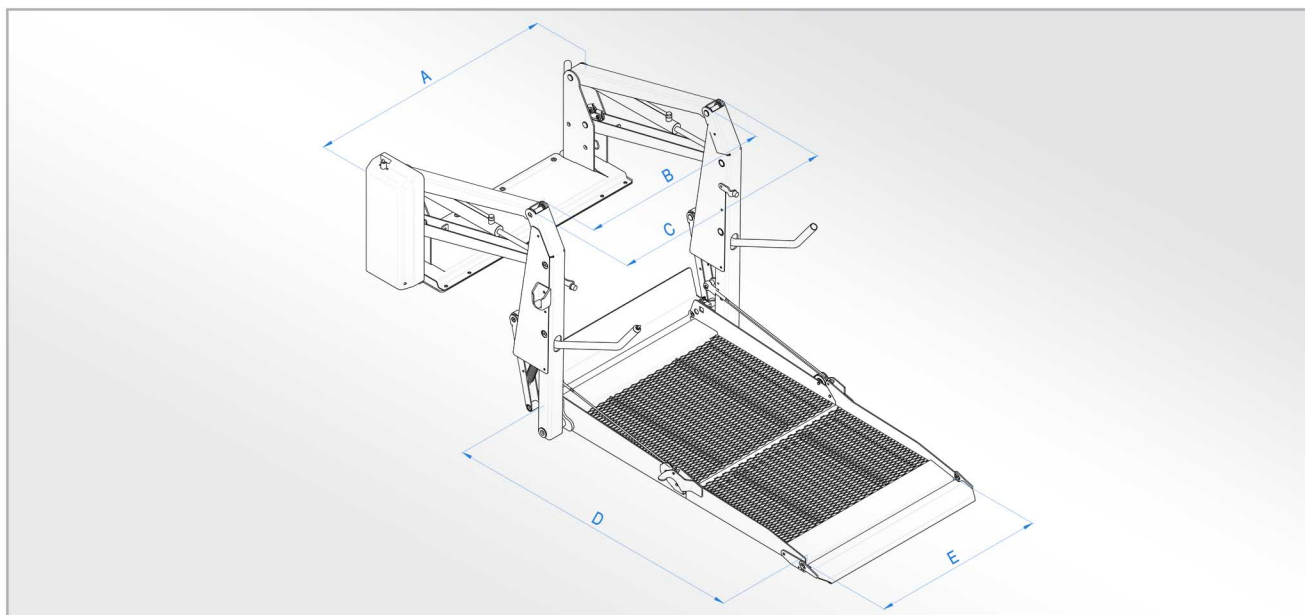

	Stationary lift width	Clear entry width	Traveling frame lift	Clear platform length	Clear platform width	Overall lift height	Max loading height	Overall lift depth	Rated load capacity (Kg)	Lift weight (Kg)
	A	B	C	D	E	F	G	H		
BBSM 1000	970	690	840	970	620	970	690	350	320	109
BBSL 1150	1085	790	940	1150	720	1130	880	350	320	122
BBS 1250	1165	880	1030	1250	800	1220	920	370	350	155
BBS 1395	1165	880	1030	1395	800	1220	920	370	350	156
BBS 1400	1265	970	1120	1395	900	1120	920	370	350	166