

LIFTS WITH VERTICALLY FOLDING PLATFORM

Easy access and good visibility



The automatic, twin-arm, electro-hydraulic lifts in the BBW Series have a vertically folding platform. Thanks to a two-button control unit and the use of top quality materials, these devices are not only user friendly, they are also extremely reliable. Available in a wide range of sizes, they can be internally rear and side mounted in a wide variety of people carriers. These devices are unusual, as they not only guarantee good visibility, but also provide an additional access point.

SPECIFICATIONS

- Movement powered by two hydraulic cylinders
- Vertically folding platform with anti-slip surface
- Anti-rust powder paint coating
- Self-lubricating bushings and pins
- Two-button control unit
- 12-24V Electrical System
- For use at temperatures between -30°C and +70°C
- Valid EMC accreditation (E50)
- EC standard compliant





SAFETY DEVICES

- Front safety roll stop on the automatic loading platform
- Rear safety roll stop on the automatic loading platform
- Anti-tilting control valve
- Automatic extendable/retractable handrails

EMERGENCY

- Emergency operation lift via auxiliary hydraulic pump
- Emergency descent by unlocking descent valve

Technical Features

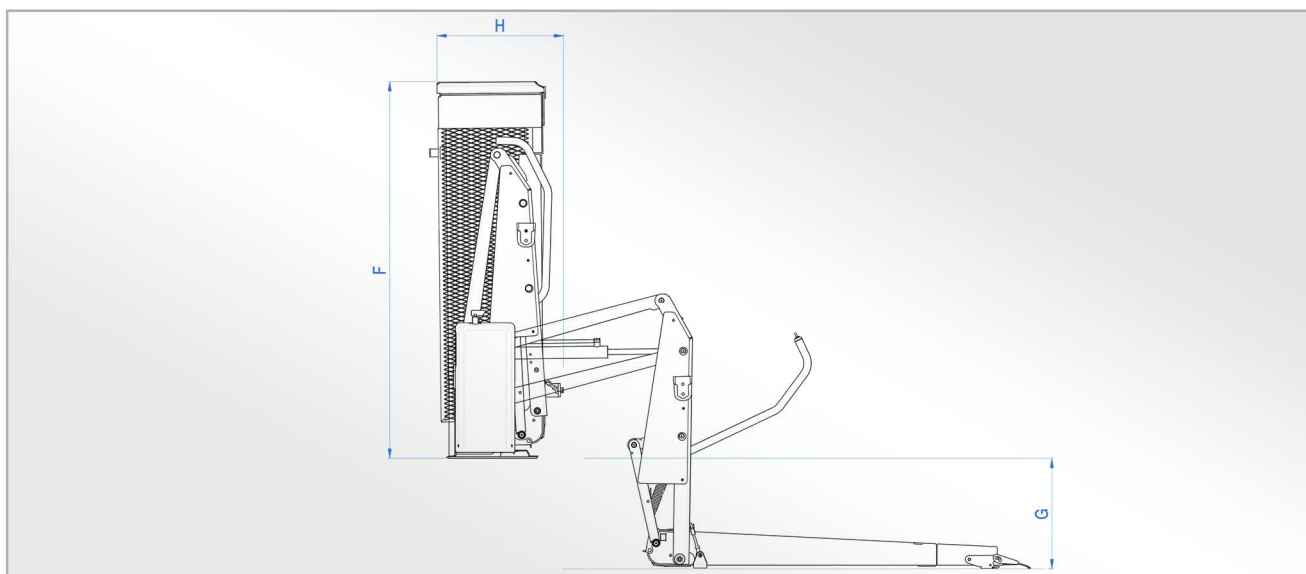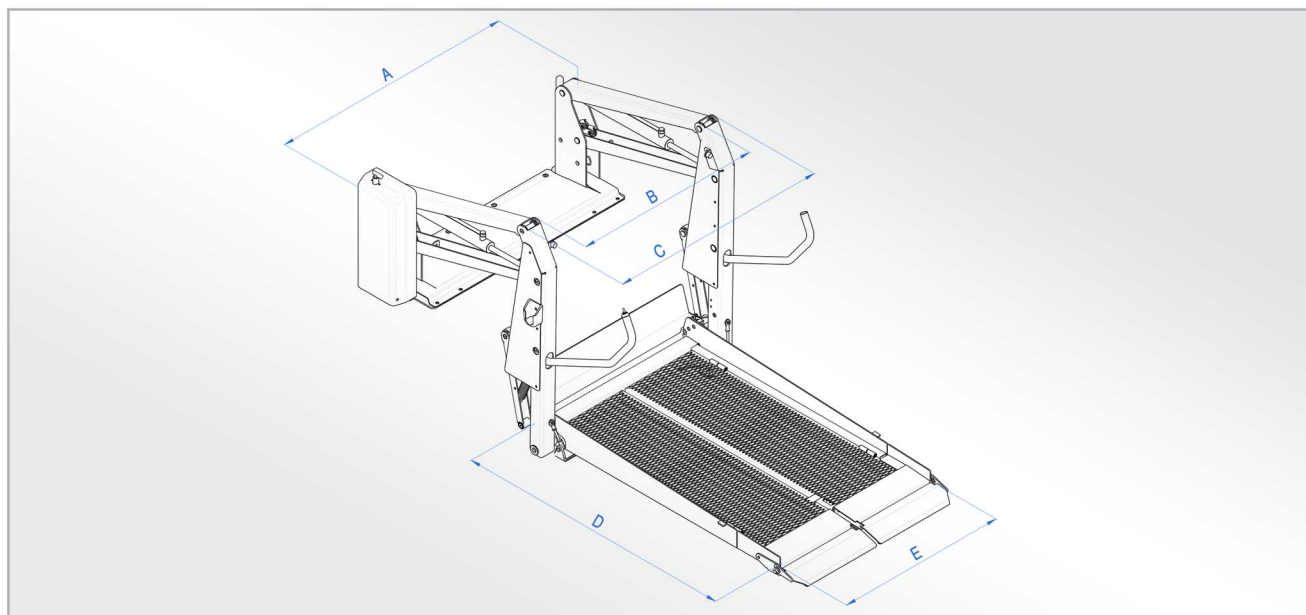

	Stationary lift width	Clear entry width	Traveling frame lift	Clear platform length	Clear platform width	Overall lift height	Max loading height	Overall lift depth	Rated load capacity (Kg)	Lift weight (Kg)
	A	B	C	D	E	F	G	H		
BBWM 905	970	690	840	915	645	1020	690	420	320	108
BBWL 1030	1085	790	940	1030	745	1180	880	485	320	126
BBW 1350	1165	880	1030	1300	800	1450	920	500	350	160
Special executions										
BBWL 1030C	1075	780	950	1030	745	1150	880	450	250	95
BBWL 1030T	1090	765	935	1030	745	1150	880	480	320	100
BBW 1350UK	1220	865	1035	1350	820	1450	880	520	400	145